


Knauf Fireshield

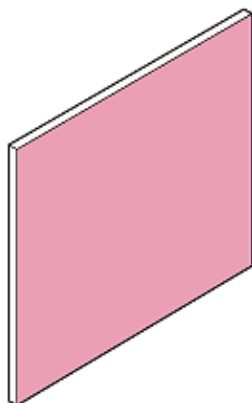

Knauf Fireshield offers superior fire protection and complies fully with BS EN520 and is categorised as Types A,F.

Knauf Fireshield has a Thermal Conductivity figure of $k= 0.24 \text{ W/mK}$.

Thermal Resistance:
 12.5mm = $0.05\text{m}^2 \text{ K/W}$
 15.0mm = $0.06\text{m}^2 \text{ K/W}$

Note: Knauf Fireshield is also available in a vapour check grade.

Square Edge

Dimensions (mm)			Article No	Pack Details		
Thickness	Width	Length		Boards	m^2	Tonnes (Approx.)
12.5	900	1800	323 02 518	80	129.6	1.17
	1200	2400	323 02 224	60	172.8	1.56

Tapered Edge

Dimensions (mm)			Article No	Pack Details		
Thickness	Width	Length		Boards	m^2	Tonnes (Approx.)
12.5	900	1800	323 01 518	80	129.6	1.30
		2400	323 01 224	60	172.8	1.73
	1200	2700	323 01 267	60	194.4	1.94
		3000	323 01 300	48	172.8	1.73
15.0	1200	2400	324 01 324	48	138.2	1.66
		2700	324 01 327	48	155.5	1.87
	1200	3000	324 01 300	24	86.4	1.04